


ENERGIZER NO. E92



Industry Standard Dimensions in mm (inches)

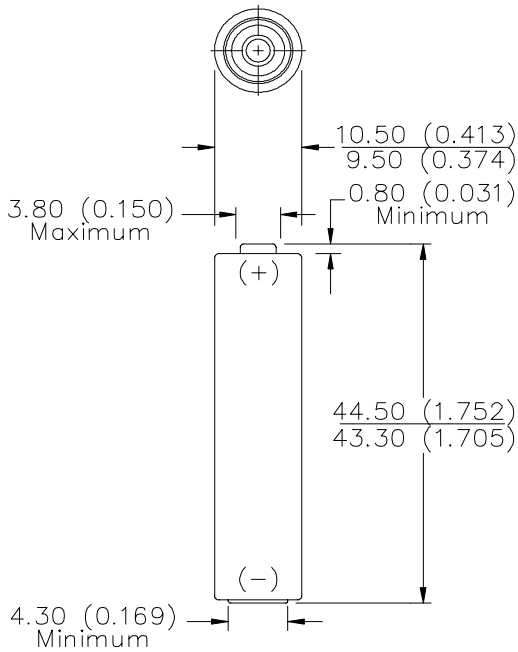

AAA

Chemical System: Alkaline
 Zinc-Manganese Dioxide (Zn/MnO₂)
 (No Added Mercury or Cadmium)

Designation: ANSI-24A, IEC-LR03

Battery Voltage: 1.5 Volts

Internal Resistance: 205 Milliohms (Fresh)

Operating Temp: -18°C to 55°C (0°F to 130°F)

Average Capacity: 1,250 mAh (to 0.8 volts)
 (Rated capacity at 25 mA continuous drain)

Average Weight: 11.5 grams (0.4 oz.)


Volume: 3.8 cubic centimeters (0.2 cubic inch)

Cell: One No. 3-312 (size 'AAA')


Jacket: Plastic Label

Shelf Life: 7 years (80% of rated capacity)


TEMPERATURE EFFECTS Typical Service to 0.8 Volts

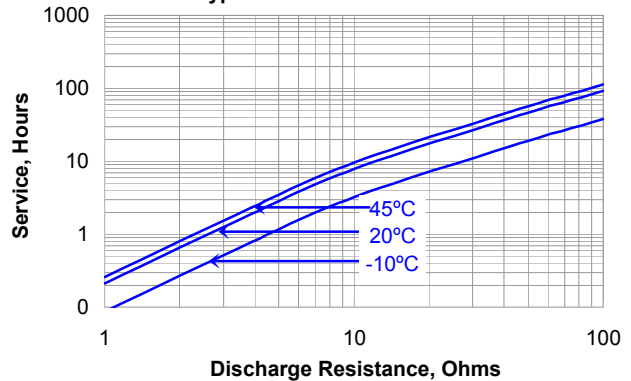

CONSTANT RESISTANCE PERFORMANCE Typical Service

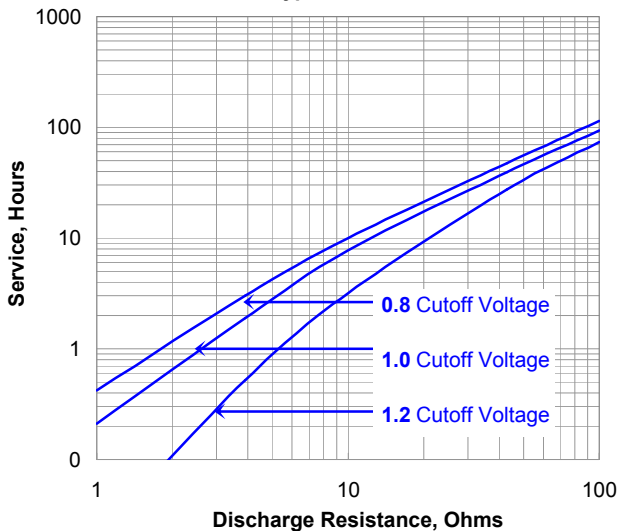

CONSTANT CURRENT DISCHARGE Typical Service

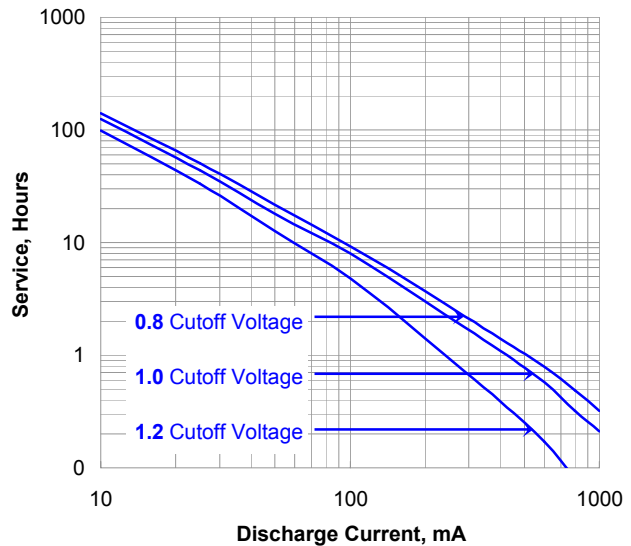

Important Notice


This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.


Copyright © Eveready Battery Co. - All rights reserved

ENERGIZER NO. E92

**CONSTANT POWER DISCHARGE
Typical Service**

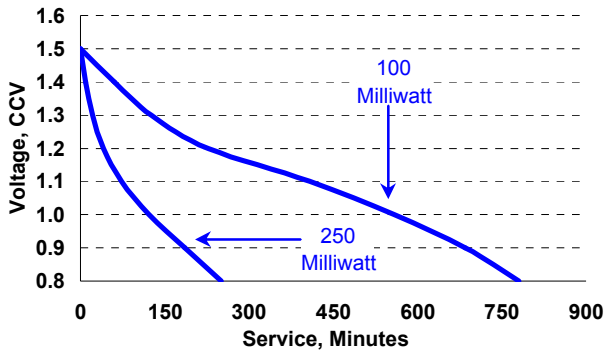


**CONSTANT POWER DISCHARGE
Typical Service**

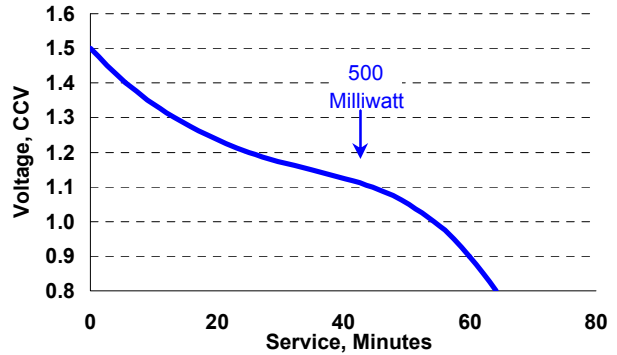


Industry Standard Tests @ 20° C


**LIGHTING
5.1 ohm - 4 min/hr 8 hr/day**

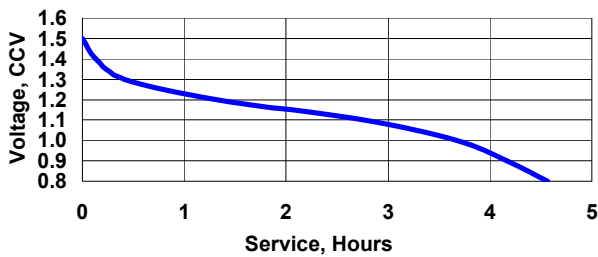


**PHOTOFLASH
600 mA - 10 sec/min 1 hr/day**

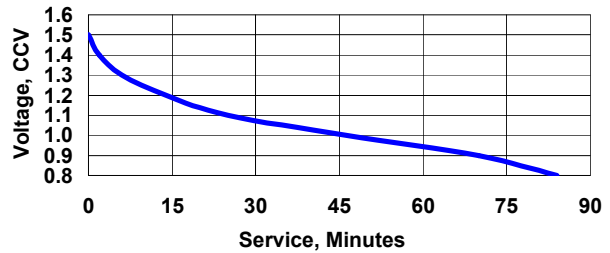

**REMOTE
24 ohm - 15 spm - 8 hr/day**

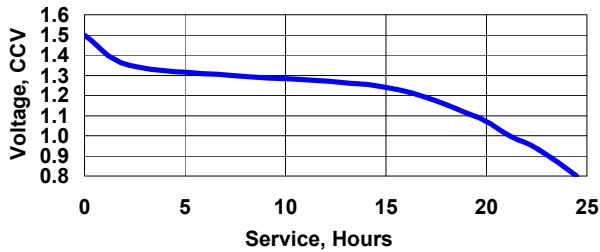

**TAPE - ELECTRONIC GAMES-DIGITAL AUDIO
100 mA - 1 hr/day**

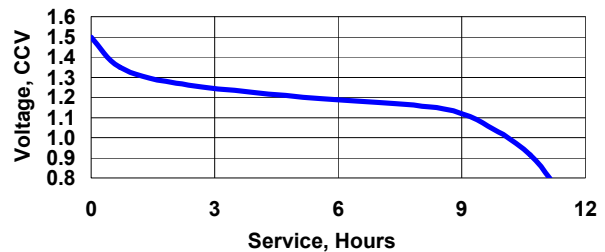

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved