
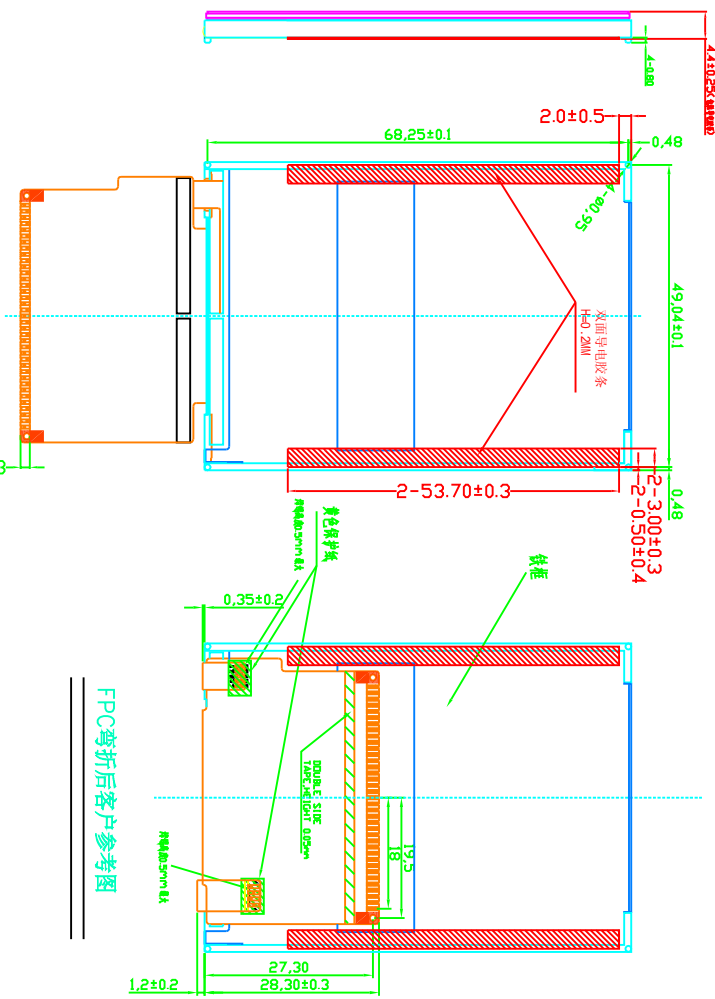


IC位置点黄胶防TP移位



1	DB0
2	DB1
3	DB2
4	DB3
5	GND1
6	VCC1
7	/CS
8	RS
9	/WR
10	/RD
11	IM0
12	X+
13	Y+
14	X-
15	Y-
16	LEDA
17	LEDK1
18	LEDK2
19	LEDK3
20	LEDK4
21	IM3
22	DB4
23	DB10
24	DB11
25	DB12
26	DB13
27	DB14
28	DB15
29	DB16
30	DB17
31	/RESET
32	VCI
33	VCC2
34	GND
35	DB5
36	DB6
37	DB7

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

NOTES:

- 1.DISPLAY TYPE: Main LCD: 283\*TFT, Transmissive
2. OPERATING TEMP: -10°C~60°C
3. STORAGE TEMP: -20°C~70°C
4. MAIN LCD DRIVER: HX8347
5. BACKLIGHT: 4CHIP-WHITE LED
6. Please ensure there is a distance of 0.4mm from TP V.A. outward on the place of contact TP and customer cover side

CUSTOMER APPROVE	AMEND	液晶显示模块	TRULY SEMICONDUCTORS LTD.
------------------	-------	--------	---------------------------

Mechanical	Electrical	TOLERANCE: DECIMAL .x ± .30 .xx ± .20 √ ± 1/4°	PRODUCT NO. DWN 黄信岳2007 CHKD 吴苏 2007	DRAW NO. DSN 黄信岳2007 APPD 陈向阳2007	REV CSZMDS3966 A
------------	------------	--	--	---	------------------------