

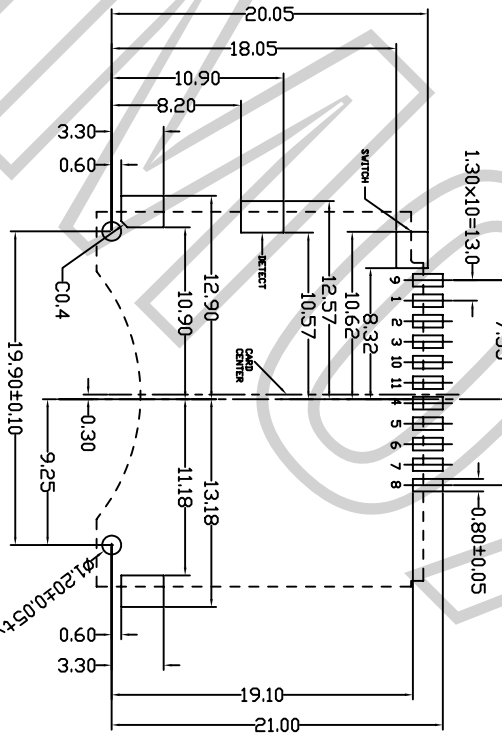
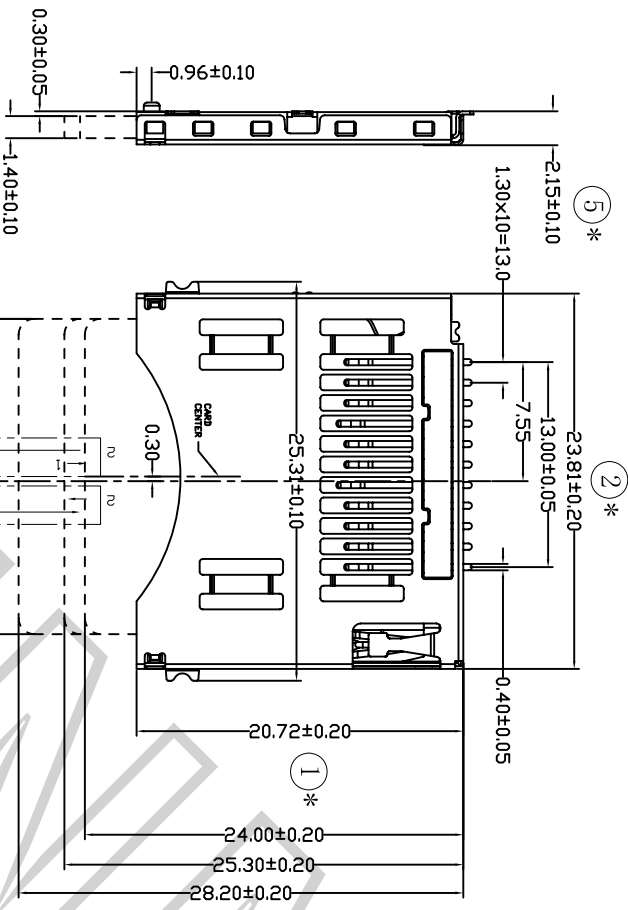


REVNO A/0	REVISION NOTE	DATE	DRAW	CHECK
--------------	---------------	------	------	-------

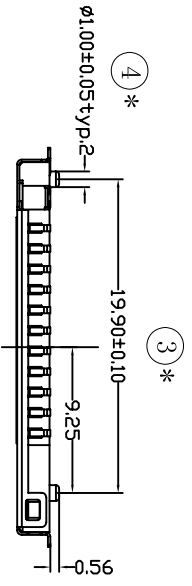


Notes:
 *Material
 Housing:High Temperature Thermoplastic
 UL 94V-0,Color:Black
 Contact:High PerformanceCopper Alloy
 Cover:Phosphor Brass
 Plating:Underplate Nickel
 Contact Area:Gold Over Nickel
 Solder Area:In/Lead Or Tin
 Only Over Nickel

CIRCUIT WITHOUT CARD



CARD INSERTED



*Electrical
 Voltage: 100V AC/DC
 Current: 0.5 A AC/DC
 Contact Resistance: 80mΩ max
 Insulation Resistance: 1000MΩ min
 Dielectric Withstanding Voltage: 500VAC
 Operating Temp: -25°C~+85°C

Pin#	Name	Type	Description
1	DD/DAT3	I/O/P#	Data Line [Bk 3]
2	CMD	PP	Command/Response
3	VSS1	S	Supply voltage Ground
4	VDD	S	Supply voltage
5	CLK	PP	Clock
6	VSS2	S	Supply voltage ground
7	DAT0	I/O/P#	Data Line[Bk 0]
8	DAT1	I/O/P#	Data Line[Bk 1]
9	DAT2	I/O/P#	Data Line [Bk 2]
10	NC		
11	NC		



KINMOX 金美電子有限公司
 Kinmox electronic co.,limited
 www.kinmox.com 0755-89737484 Fax:0755-89737017

DIMENSION UNIT MM	PRDD SPEC.	TITLE: MINI SD CONNECTOR
TOLERANCE UNLESS OTHERWISE SPECIFIED	PKG. SPEC.	PRDU.
X±0.10	APR.	PART_NUMBER:
X*±1*	CHK.	FILE NO.
XX±0.05	DRA.	REV: A/0
XXX±0.03		SHEET 1/1
		SCALE: 1:1