

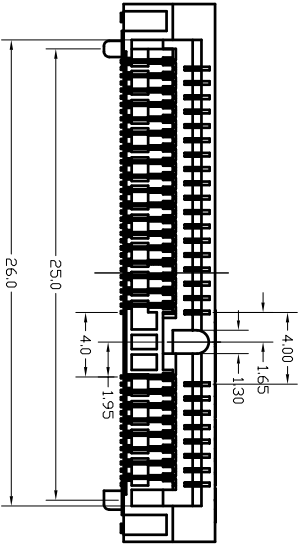
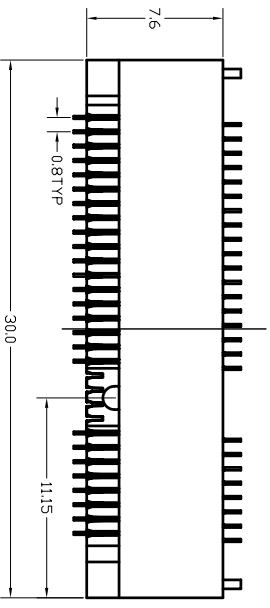
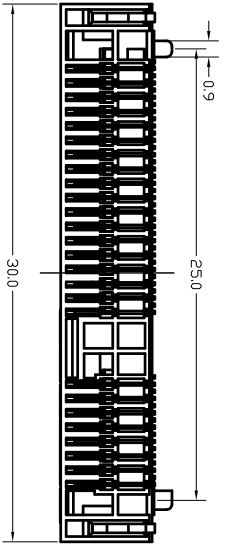
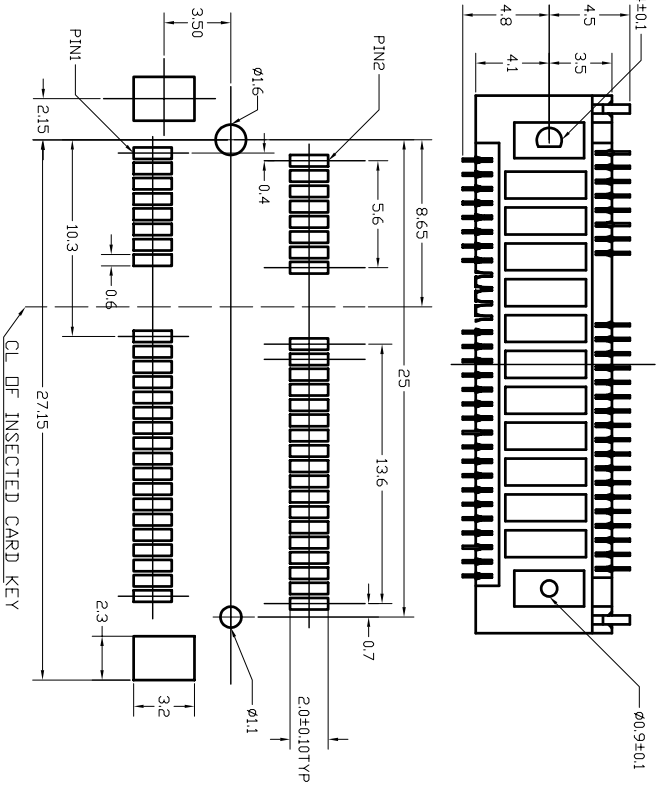


REVNO	REVISION NOTE	DATE	DRAW	CHECK
A/0				



NOTES:
 1 MATERIAL: HOUSING: LCP COLOR: WHITE OR BLACK, UL94V-0
 CONTACT: PHOSPHOR BRONZE
 2 FINISH: CONTACT: NICKEL PLATED OVERALL AS UNDERPLATED
 HARD GOLD PLATED OVERALL
 NAIL-NICKEL PLATED OVERALL AS UNDERPLATED
 TIN PLATED OVERALL
 3 HOW TO ORDER: SEE DIM A AND DIM B TO CONFIRM THE HEIGHT
 ISSUED BY KINMOX ELECTRONIC: KMPCIA-52P85XXH-A (XX SEE DIM A)
 4 ELECTRICAL CHARACTERISTICS:
 VOLTAGE RATING: 50V AC PER CONTACT
 CURRENT RATING: 0.5AMP PER CONTACT
 DIELECTRIC WITHSTANDING VOLTAGE: 300V AC RMS (MIN)
 INSULATION RESISTANCE: 500 MEGOHMS AT 500V DC (MIN)
 CONTACT RESISTANCE: 50 MILLIOHMS MAX (INITIAL)
 5 MECHANICAL CHARACTERISTICS:
 INSERTION FORCE: 2.3KGF MAX
 WITHDRAWAL FORCE: 2.3KGF MAX

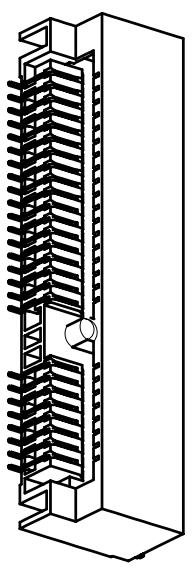

PART NO.	DIM A	DIM B
KMPCIA-52P8540H-A	4.0	1.65
KMPCIA-52P8552H-A	5.2	2.85
KMPCIA-52P8556H-A	5.6	3.25
KMPCIA-52P8568H-A	6.8	4.45

DIMENSION UNIT MM		PRD. SPEC.	KINMOX 金美電子有限公司 Kinmox electronic co., limited www.kinmox.com 0755-89737484 Fax:0755-89737017	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE: PCI EXPRESS CONNECTOR 52PIN	
X±0.10	X*±1*	APR.	PRD.	
.XX±0.05	.X*±0.5*	CHK.	PART NUMBER:	
.XXX±0.03	.XX*±0.3*	DRA.	FILE NO.	REV: A/0
			SHEET 1/1	SCALE: 1:1